
Be ahead

HOME
ACCESS AUTOMATION

ATHOS AC A



ATHOS AC A

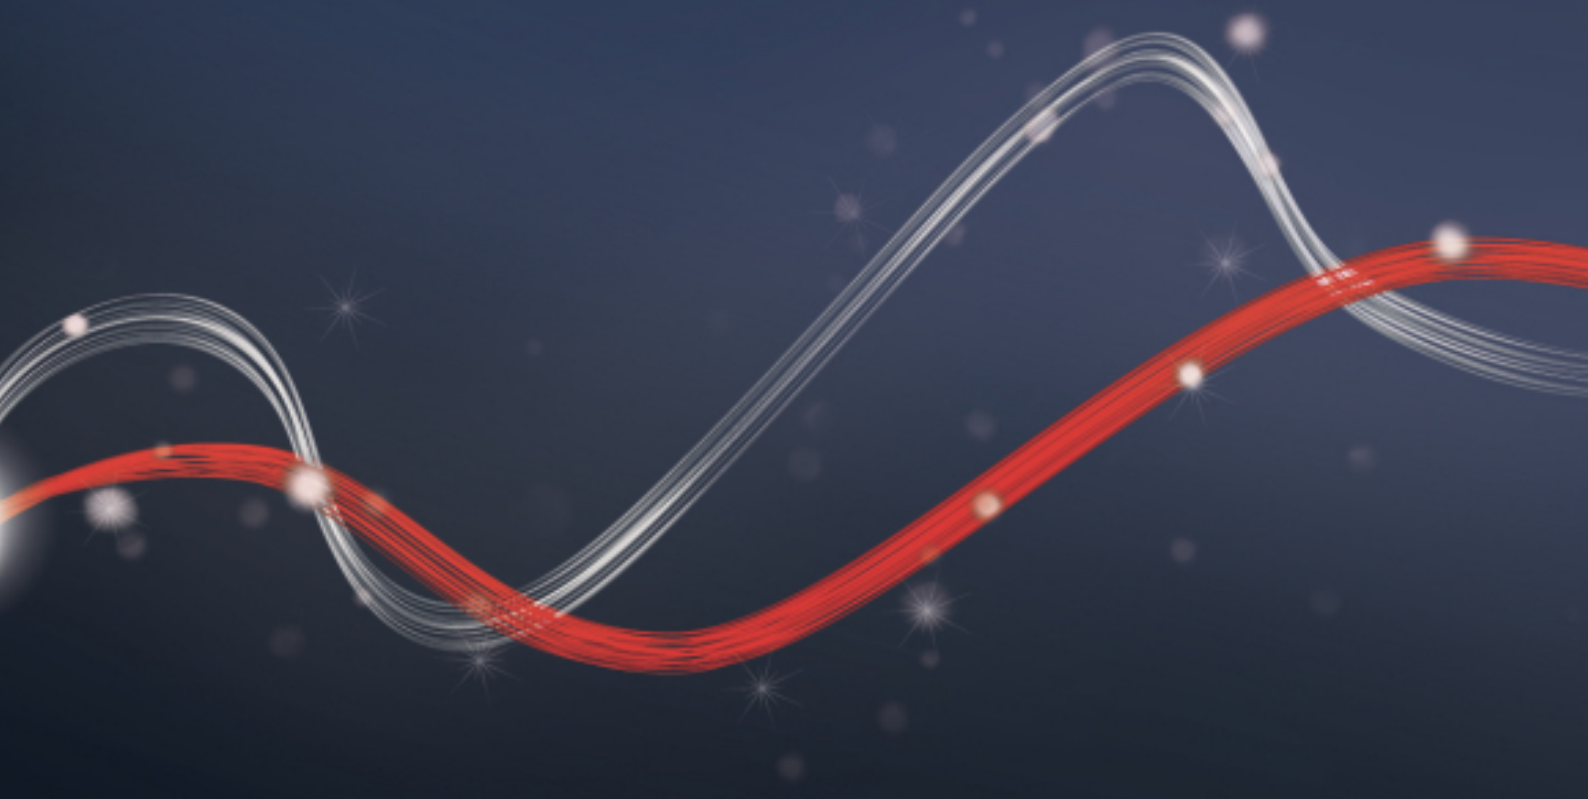



ADVANTAGES

Strength & robustness: thanks to its sturdy structure and to its high-end materials such as die-cast aluminum shells and bronze crown transmission, Athos guarantees the maximum strength, reliability and longer life span.

Compact design: Athos is designed to space saving and allows the maximum installation flexibility to be installed even in a niche.

Maximum comfort: Athos motor can open in just 14 sec (90° mod. AC A25) or 16 sec. (90° mod. AC A40).

Ease of installation: front & rear brackets are aligned, so that the installation is easy & quick.


ATHOS AC A

ALENA SW2 D113811 00004 Recommended

Control panel with slow-down, dip switches and potentiometers for one or two 230V 400W+400W, operators for swing gates and industrial folding doors



- Application: control panel for one or two operators for swing gates
- Board power supply: 230V single-phase
- Operators power supply: 230V single-phase 400W max each operator
- Main functions: stays locked when closed, 3/4 step logic, partial opening, fast closing and self-diagnostics
- Compatibility: ALTAIR and ARIES



970 = **ATHOS AC 25A**
1170 = **ATHOS AC 40A**



Cu max 300mm = **ATHOS AC 25A**
Cu max 400mm = **ATHOS AC 40A**

	Code	Name		Description
	D113811 00004	**ALENA SW2**	new	ALENA SW2 230V control panel
	D113811 00003	**ALENA SW2 120V**	new	ALENA SW2 120V control panel
	N999724	**PLE ATHOS**	new	Anchor plate for welding the mountings to masonry pillars for ATHOS operators
	D610180	**CLS**		Triangular release key l=52mm
	N190104	**BIR C**		Rubber safety edge (H 30 mm), price per m
	P111401 00001	**VENTIMIGLIA NS**		Infrared device for BIR C or BAR C safety edges (conforms to EN 12978 Standard)
	D111013	**ME**		Control board for 12Vac solenoid lock for 230V automation systems
	D121018	**ECB VERTICALE**		Vertical solenoid lock, 12-24V
	D113748 00002	**RADIUS B LTA 230 R1**		Flashing light with incorporated antenna for motors with power supply 230 V.
	D113749 00002	**RADIUS B LTA 230 R2**		Flashing light without incorporated antenna for motors with power supply .
	P123026	**B 00 R01**		Metal guard for B LTA
	P123025	**B 00 R02**		Wall mounting for B LTA series flashing beacons
	D111904	**MITTO B RCB02 R1**		Transmitter with 2 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A
	P121022	**Q.BO KEY WM**		Key selector for outdoor use with double contact.
	P121023	**Q.BO KEY WM AV**		Vandalproof key selector with double contact, for outdoor use. Metal structure. Vandalproof key selector with metal structure.
	P111526	**DESME A15**		Pair of self-aligning photocells. Range 30 m. Power supply 24 V ac/dc.

	Code	Name	Description
	P121024	**Q.BO TOUCH**	Wireless digital touchpad with 433MHz rolling code operation. Manages up to 10 channels and 100 codes.
	P903018	**PHP**	Pair of aluminium posts for THEA/DESME series photocells Height 522 mm
	P123001 00001	**EBP**	EBP 230Vac electric drop lock
	P123001 00013	**EBP 24**	24Vac solenoid lock, with 230/24V transformer installable in control panel
	P111052	**CM1700**	Mechanical safety edge, length 1.7 m
	P111053	**CM2000**	Mechanical safety edge, length 2 m

What is U-Link?

The innovative technology that gives you new power



An exclusive Bft innovation: U-Link (Universal Link) is an exclusive Bft platform that allows the creation of technological ecosystems. In Home Automation Access, it allows communication with all the home access automation devices of any brand. So you save time and can control everything with ease, without any worries.

It is intuitive
Easy to install and use

It is scalable
Allows an unlimited number of devices to be added

It is flexible
Allows the creation of groups of interconnected products

It is practical
Works with or without a web connection

It is functional
Parameters can be controlled remotely via dedicated applications

ATHOS AC A

All in one scheme: discover this amazing technology

A unique platform allowing the creation of technological ecosystems offering a wide range of solutions for different sectors.

Thanks to the **B-Eba** cards and the **Clonix U-Link receiver, this proprietary platform featured by Bft products adapts to any protocol and access automation product** (even BFT, non-native U-Link or non-BFT products), and **is used in various sectors**. Each device thus becomes smart and can be interconnected with other systems, thanks to a language that becomes universal.



U-Base 2

Software to install and easily and comfortably carry out maintenance and identify any malfunction of U-link compatible operators.



U-SDK

U-Sdk is the innovative application that can make Bft automation systems compatible and easily integrated with a BMS network for the supervision of buildings.



Magistro

An innovative and easy to install system for easily managing all home automation systems.



U-Control

U-Control is the application that helps the quick and easy integration of BFT automation systems in large building management systems.



Blue-Entry

Technology abreast of the times and attentive to daily needs: thanks to the use of U-link the house gate can now be opened with just your smartphone.



Clonix U-Link

Allows the connection of non-native U-Link products or non-Bft products to U-Link systems.


Bft operators, non-native U-Link products or a product belonging to other brands: can they be connected to U-Link? Yes, thanks to the Clonix receivers. Accessories that know no limits.



B-eba

A direct line with your operators.

B-eba expansion cards allow the connection of external devices, such as PCs, smartphones and tablets, to a Bft operator or Clonix receiver, or the connection of several Bft products in a U-Link network. These accessories integrate with U-Link technology and Bluetooth, Z-Wave, TCP/IP protocols, as well as the RS485 serial connection.
A device that fully translates what Bft means for interconnectivity.

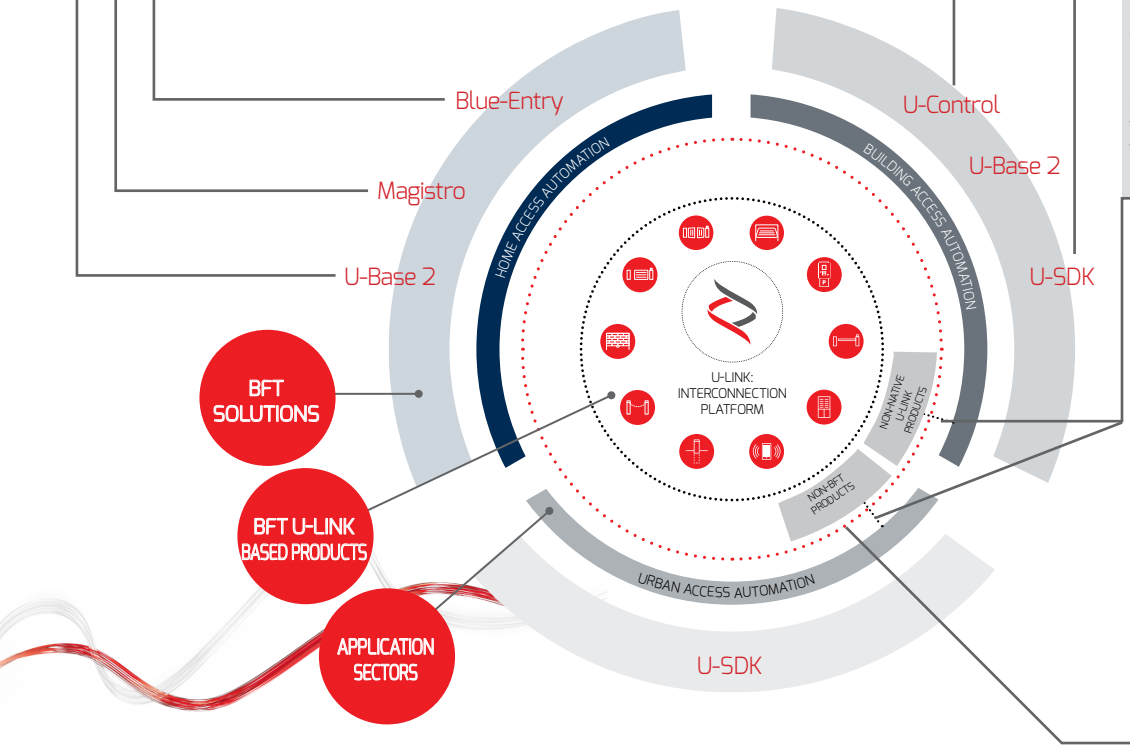







INFORMATION REGARDING THE PROTECTION OF THE INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS OF BFT. BFT S.p.A. protects its industrial property by depositing trademarks, patents, models and designs. The intellectual property of BFT S.p.A. is protected by copyright law. BFT S.p.A. also protects its know-how by taking measures to protect the technical and commercial information inherent in its company and products. All the products in this catalogue are ORIGINAL BFT MODELS and only BFT S.p.A is authorised to produce them and market them anywhere in the world. All the commercial names in this catalogue are owned by BFT S.p.A., and only BFT S.p.A. is authorised to use them in relation to the corresponding merchandise category. FALSIFIERS WILL BE PROCEEDED AGAINST IN ACCORDANCE WITH BOTH CIVIL AND CRIMINAL LAW. THESE CONDITIONS NOT ONLY GUARANTEE THE INTELLECTUAL PROPERTY RIGHTS OF BFT, BUT ALSO PROTECT CUSTOMERS BY GUARANTEEING THAT THE PRODUCTS THEY ARE PURCHASING ARE ORIGINAL BFT PRODUCTS RESULTING FROM STUDIES AND DESIGNS WITHIN THE BFT COMPANY.