
Be ahead

HOME
ACCESS AUTOMATION

DEIMOS BT A



DEIMOS BT A

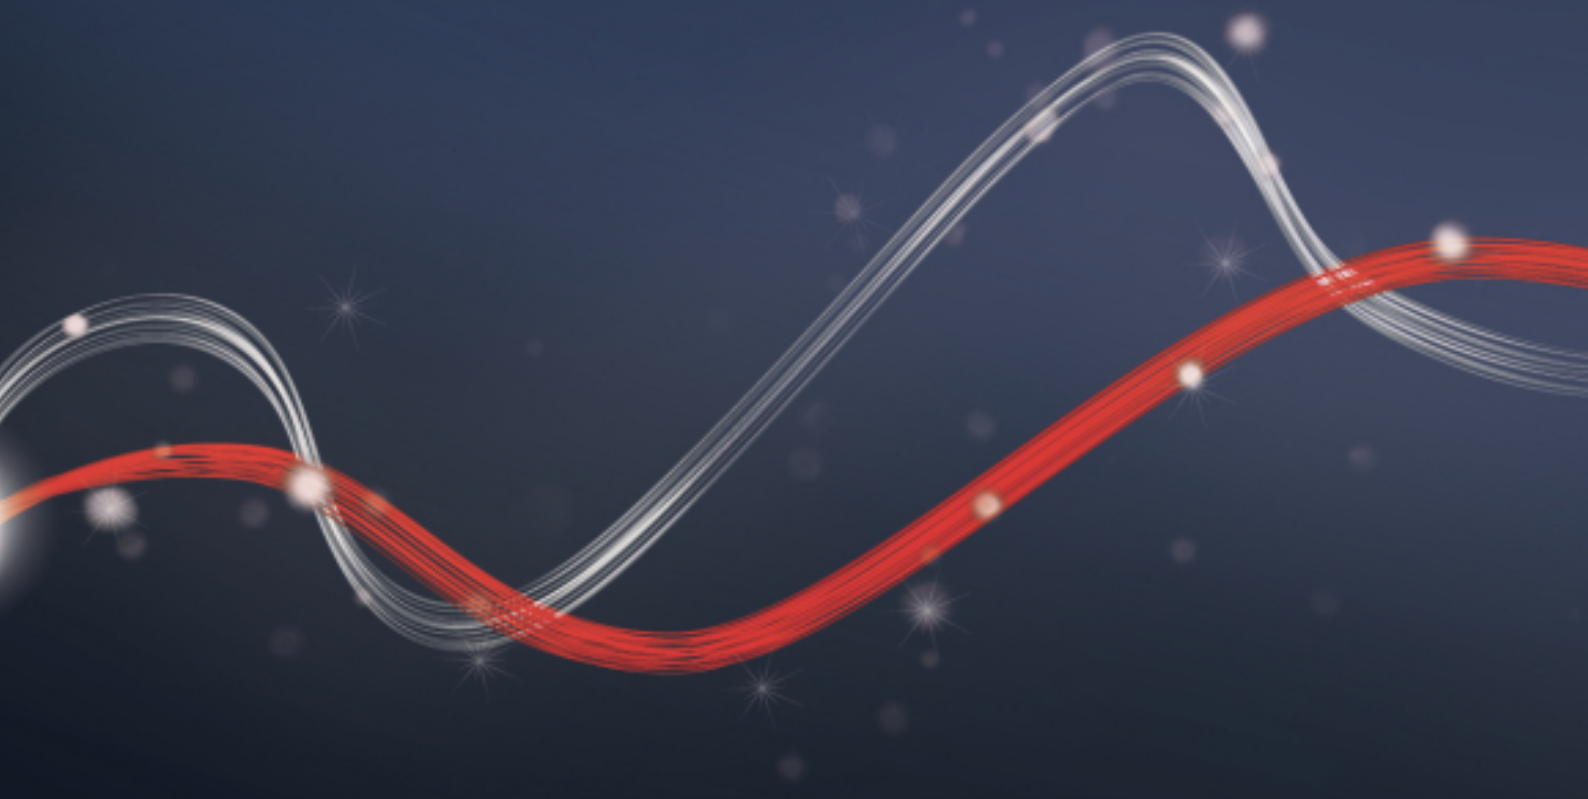



ee link
24 V
er ready
d-track

Range of operators for sliding gates weighing up to 600 Kg.
Maximum leaf speed up to 16 m/min.
Residential use.

DEIMOS BT A

d-track er ready ee link 24 V

Code	Name	Description	
P925222 00002	DEIMOS BT A400	Operator 24 V for sliding gates up to 400 kg in weight. Leaf speed 12 m/min.	d-track
P925222 00003	DEIMOS BT A400 V	Operator 24 V for sliding gates up to 300 kg in weight. Leaf speed 16 m/min.	d-track
P925222 00005	DEIMOS BT A400 SQ	Operator 24 V for sliding gates up to 400 kg in weight. Leaf speed 12 m/min.	
P925222 00006	DEIMOS BT A400 V SQ	Operator 24 V for sliding gates up to 300 kg in weight. Leaf speed 16 m/min.	
P925222 00001	DEIMOS BT A400 120	Operator 24 V for sliding gates up to 400 kg in weight. Leaf speed 12 m/min.	
P925222 00004	DEIMOS BT A400 V 120	Operator 24 V for sliding gates up to 300 kg in weight. Leaf speed 16 m/min.	
P925224 00002	DEIMOS BT A600	Operator 24 V for sliding gates up to 600 kg in weight. Leaf speed 12 m/min.	d-track
P925224 00003	DEIMOS BT A600 V	Operator 24 V for sliding gates up to 360 kg in weight. Leaf speed 16 m/min.	d-track
P925224 00005	DEIMOS BT A600 SQ	Operator 24 V for sliding gates up to 600 kg in weight. Leaf speed 12 m/min.	
P925224 00006	DEIMOS BT A600 V SQ	Operator 24 V for sliding gates up to 360 kg in weight. Leaf speed 16 m/min.	
P925224 00001	DEIMOS BT A600 120	Operator 24 V for sliding gates up to 600 kg in weight. Leaf speed 12 m/min.	
P925224 00004	DEIMOS BT A600 V 120	Operator 24 V for sliding gates up to 360 kg in weight. Leaf speed 16 m/min.	
R925267 00002	DEIMOS BT KIT A400 FRA	Complete kit 24 V for sliding gates weighing up to 400 kg. Leaf speed 12 m/min. Limit switch Electromechanical.	d-track

DEIMOS BT A

d-track er ready ee link 24 V

Code	Name	Description
R925271 00002	DEIMOS BT KIT A600 FRA	Complete kit 24 V for sliding gates weighing up to 600 kg. Leaf speed 12 m/min. Limit switch Electromechanical.


d-track

DEIMOS BT A

HAMAL HAMAL Built-In



- Board power supply: 230V single-phase
- Operator power supply: 24V 80W
- Main features: removable terminal blocks with new standard colour-coding, dip-switch programming and potentiometers, incorporated dual channel receiver, D-Track anti-crushing system, slowdown during opening and closing
- Main functions: automatic re-closing, pedestrian opening, input for 8k2 edge, fast closing

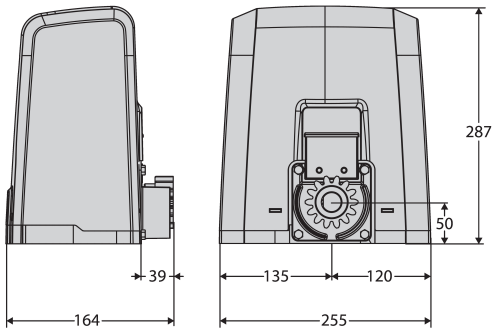

	DEIMOS BT A400	DEIMOS BT A400 V	DEIMOS BT A400 SQ	DEIMOS BT A400 V SQ	DEIMOS BT A400 120	DEIMOS BT A400 V 120	DEIMOS BT A600	DEIMOS BT A600 V	DEIMOS BT A600 SQ	DEIMOS BT A600 V SQ	DEIMOS BT A600 120	DEIMOS BT A600 V 120
Control unit	HAMAL SL1				HAMAL SL1		HAMAL SL2				HAMAL SL2	
Power supply	24 V											
Power input	50 W						70 W					
Type of limit switch	electromechanical											
Pinion module	4											
Slowdown	yes											
Locking	mechanical											
Release	lever-operated with personal key											
Frequency of use	intensive											
Environmental conditions	from -20 °C to 55 °C											
Protection rating	IP24											
Actuator weight	7 kg						8 kg					
Impact reaction	d-track											

DEIMOS BT A

	Code	Name	Description
	D221073	**CP**	Plastic rack, 4-module, cross-section 22 x 22 mm, length 1 m, screw-fitted into slots
	N999151	**SFD**	Base plate for DEIMOS series (supplied with operator) Base plate for DEIMOS series (supplied with operator)
	N190104	**BIR C**	Rubber safety edge (H 30 mm), price per m
	D111904	**MITTO B RCB02 R1**	Transmitter with 2 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A
	P121016	**RB**	4-channel wall-mounted radio control with rolling code
	D113748 00003	**RADIUS B LTA 24 R1**	Flashing light with incorporated antenna for motors with power supply 24 V.
	D113749 00003	**RADIUS B LTA 24 R2**	Flashing light without incorporated antenna for motors with power supply 24 V.
	D113783	**IPNOS B LTB 24 R1**	Flashing light with LED technology and built-in receiver antenna. New design language with smoke-grey cover.Power supply 24 V ac/dc.
	P123026	**B 00 R01**	Metal guard for B LTA
	P123025	**B 00 R02**	Wall mounting for B LTA series flashing beacons
	P121024	**Q.BO TOUCH**	Wireless digital touchpad with 433MHz rolling code operation. Manages up to 10 channels and 100 codes.
	P121022	**Q.BO KEY WM**	Key selector for outdoor use with double contact. Key selector for outdoor use with double contact.
	P111526	**DESME A15**	Pair of self-aligning photocells. Range 30 m. Power supply 24 V ac/dc. Pair of self-aligning photocells. Range 30 m. Power supply 24 V ac/dc.
	P111527	**DESME A15 O**	Pair of photocells adjustable 40 ° horizontally and 10 ° vertically. IR signal synchronised to prevent any risk of blinding. Range 30 m. Power supply 24 V ac/dc.
	P903018	**PHP**	Pair of aluminium posts for THEA/DESME series photocells Height 522 mm

DEIMOS BT A

	Code	Name		Description
	P125035	**SL BAT2**	new	Emergency battery kit for Deimos BT A, Ares BT A, Deimos Ultra BT A, Ares Ultra BT A.

What is U-Link?

The innovative technology that gives you new power



An exclusive Bft innovation: U-Link (Universal Link) is an exclusive Bft platform that allows the creation of technological ecosystems. In Home Automation Access, it allows communication with all the home access automation devices of any brand. So you save time and can control everything with ease, without any worries.

It is intuitive
Easy to install and use

It is scalable
Allows an unlimited number of devices to be added

It is flexible
Allows the creation of groups of interconnected products

It is practical
Works with or without a web connection

It is functional
Parameters can be controlled remotely via dedicated applications

DEIMOS BT A

All in one scheme: discover this amazing technology

A unique platform allowing the creation of technological ecosystems offering a wide range of solutions for different sectors.

Thanks to the **B-Eba** cards and the **Clonix U-Link receiver, this proprietary platform featured by Bft products adapts to any protocol and access automation product** (even BFT, non-native U-Link or non-BFT products), and **is used in various sectors**. Each device thus becomes smart and can be interconnected with other systems, thanks to a language that becomes universal.



U-Base 2

Software to install and easily and comfortably carry out maintenance and identify any malfunction of U-link compatible operators.



U-SDK

U-Sdk is the innovative application that can make Bft automation systems compatible and easily integrated with a BMS network for the supervision of buildings.



Magistro

An innovative and easy to install system for easily managing all home automation systems.



U-Control

U-Control is the application that helps the quick and easy integration of BFT automation systems in large building management systems.



Blue-Entry

Technology abreast of the times and attentive to daily needs: thanks to the use of U-link the house gate can now be opened with just your smartphone.



Clonix U-Link

Allows the connection of non-native U-Link products or non-Bft products to U-Link systems.


Bft operators, non-native U-Link products or a product belonging to other brands: can they be connected to U-Link? Yes, thanks to the Clonix receivers. Accessories that know no limits.



B-eba

A direct line with your operators.

B-eba expansion cards allow the connection of external devices, such as PCs, smartphones and tablets, to a Bft operator or Clonix receiver, or the connection of several Bft products in a U-Link network. These accessories integrate with U-Link technology and Bluetooth, Z-Wave, TCP/IP protocols, as well as the RS485 serial connection.
A device that fully translates what Bft means for interconnectivity.

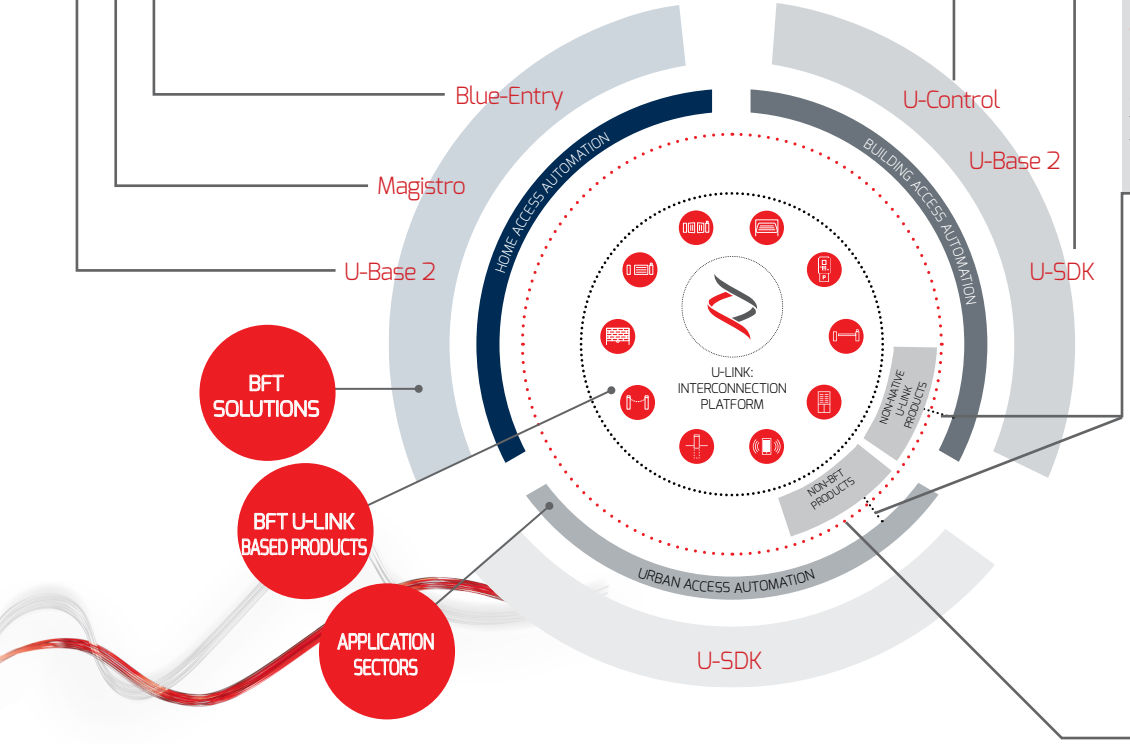







INFORMATION REGARDING THE PROTECTION OF THE INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS OF BFT. BFT S.p.A. protects its industrial property by depositing trademarks, patents, models and designs. The intellectual property of BFT S.p.A. is protected by copyright law. BFT S.p.A. also protects its know-how by taking measures to protect the technical and commercial information inherent in its company and products. All the products in this catalogue are ORIGINAL BFT MODELS and only BFT S.p.A is authorised to produce them and market them anywhere in the world. All the commercial names in this catalogue are owned by BFT S.p.A., and only BFT S.p.A. is authorised to use them in relation to the corresponding merchandise category. FALSIFIERS WILL BE PROCEEDED AGAINST IN ACCORDANCE WITH BOTH CIVIL AND CRIMINAL LAW. THESE CONDITIONS NOT ONLY GUARANTEE THE INTELLECTUAL PROPERTY RIGHTS OF BFT, BUT ALSO PROTECT CUSTOMERS BY GUARANTEEING THAT THE PRODUCTS THEY ARE PURCHASING ARE ORIGINAL BFT PRODUCTS RESULTING FROM STUDIES AND DESIGNS WITHIN THE BFT COMPANY.