
Empowered by
U-LINK
TRAFFIC BARRIERS
Range of automatic barriers
BFT
BFT
BFT
BFT
Be ahead

GIOTTO BT A ULTRA 36

Electromechanical barrier for intensive use

The Giotto Ultra is our entry-level barrier for intensive usage, it is suitable for clear drive through gaps of up to 6m. It is fitted with a 24v DC motor and comes with an extensive range of accessories which makes it suitable for almost any environment. The Giotto Ultra has the same design style as the Maxima Ultra 36 barrier. The Giotto Ultra has a Merak control panel which is U-Link compatible and is equipped with scenario programming for fast and precise installations. It is possible to fully programme the control panel using just a handful of selection options on the display, saving time and ensuring the best results. The control panel is located in the upper part of the barrier and protected by a solid aluminium casing for easy and safe programming and maintenance operations. The barrier is compatible with the PS boom range.


U-Link


Rolling Code

ER Ready

EE Link

24v

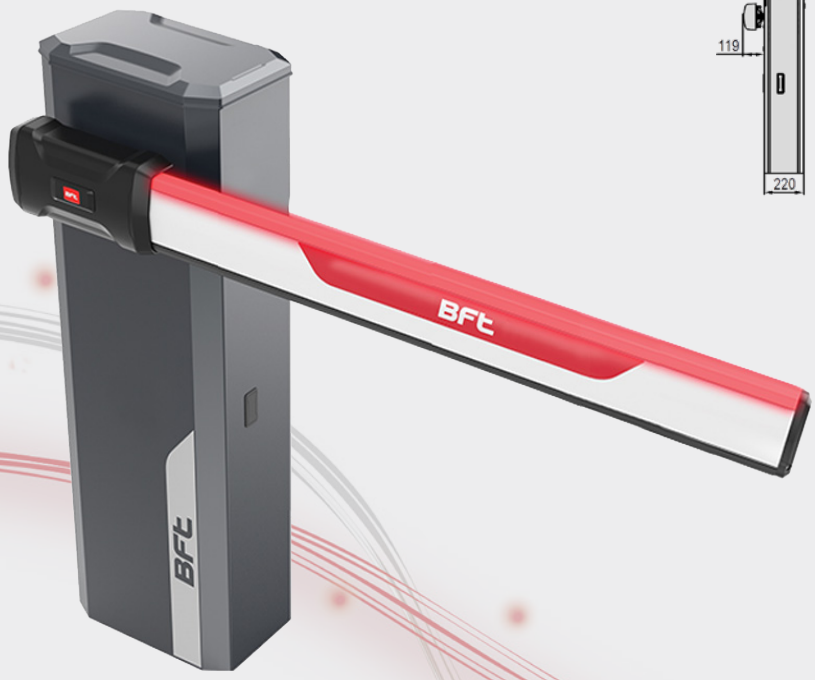

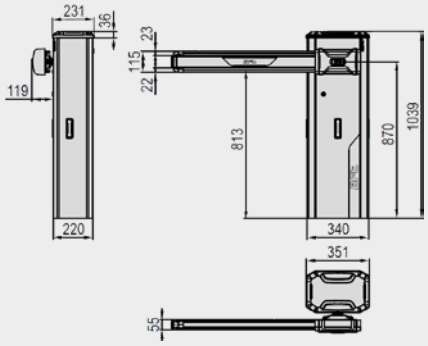

FEATURES

- Encoder technology
- Control unit with U-Link and programming display
- 24v motor

SPECIFICATIONS

	GIOTTO BT A ULTRA 36	GIOTTO BT A ULTRA 36 XL
Opening	max. 4m	max. 6m
Frequency of use	5,000 movements per day	2,000 movements per day
Opening or closing	2.2 sec (@3m)	4 sec (@6m)
Control unit	MERAK	MERAK
Motor power supply	24v	24v
Gearbox type	grease lubricated	grease lubricated
Limit switch type	electromechanical	electromechanical
Slowdown	adjustable	adjustable
Locking	mechanical	mechanical
Unlocking	personalised key	personalised key
Environmental conditions	-20°C to +55°C	-20°C to +55°C
Protection rating	IP54	IP54