PRODUCT TECHNICAL DATASHEET

KIT BM30/400


Low Voltage 24V-36V



CODE	DESCRIPTION	PCS/PALLET
KIT BM30/400	KIT Brushless digital electromechanical gear motor BM30/403 irreversible ideal for sliding gates up to 500 kg with control unit incorporated on board B70 series, mechanical limit switch, a 2-channel plug-in radio receiver H93/RX20/I and two remote controls E80/TX52R/2.	44


PRODUCT TECHNICAL SPECIFICATIONS	
Max gate weight	500 kg
Power line supply	230V AC - 50Hz
Motor power supply	24V
Power rating	150W
Frequency of use	500 cycles per day
Thrust	50 - 450N
Operating temperature	-20+55°C
Protection level	IP43
Reductor Type	Irreversible
Manoeuvre speed	14 m/min
Motor thermal protection	150°C
Limit switch	Mechanical
Onboard control unit	B70/1DC - 24V DC
Encoder	Digital native encoder + magnetic digital SENSORED, 4096 PPR
Type exit gear	Z15/mod 4
Maximum dimension product in mm (L x W x H)	250 x 165 x 290
Product weight packed (Kg)	10,3

PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

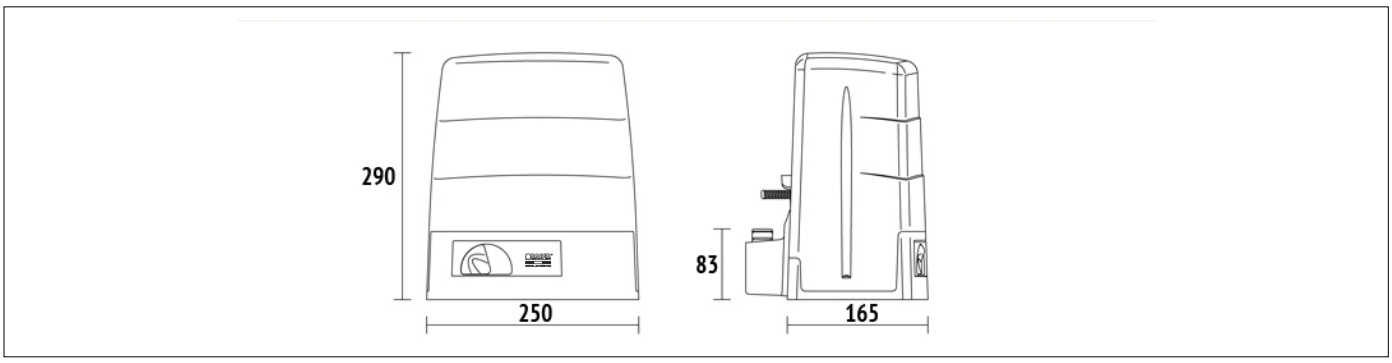


DIMENSIONS

PRODUCT PREPARING FOR INSTALLATION

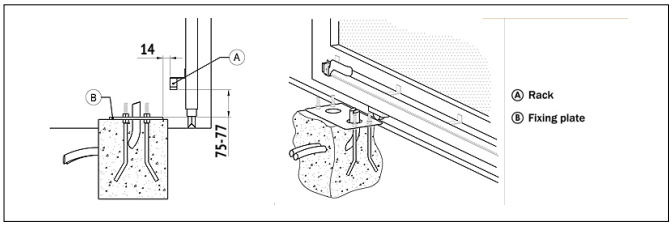


PREDISPOSITION FOR STANDARD INSTALLATION

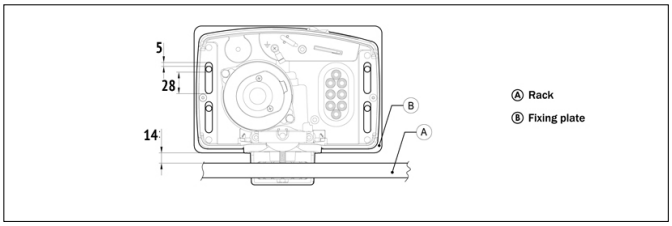


PREDISPOSITION FOR STANDARD INSTALLATION

PRODUCT ACCESSORIES




KT220
Raised fixing plate for M30 series (+3 cm).



KT223
Fixing plate with stay bolts and screws M30 series.




GA550
Galvanised steel rack 22x22x1000 module 4.




GA551
Galvanised steel rack 30x12x1000 module 4 with spacers and screws.



GA554
Pocket of 6 spacers (2,5 Cm) and screws.



GA557
Roger Technology nylon rack module 4 with 6 connectors L.1000.



MC775
Kit magnetic limit switch for control unit H70/103AC, H70/104AC, B70/1DC, B70/1DCHP.



R99/C/001
Signboard "Automatic Opening".