KIT PRODUCT TECHNICAL DATASHEET

KIT R20/310




COMPOSIZIONE KIT R20/310

CODICE	DESCRIZIONE	QTA
R20/300	Electromechanical actuator 230V AC irreversible for swing gate with leaf up to 2.5 mt. short, fast, with 1 microswitch, complete with fixing plates.	2
H70/200AC/BOX	Control unit for 2 motors 230V AC with slow down, with plastic box.	1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70, EDGE and CTRL.	1
E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2
R90/F2ES	Pair of external photocells synchronized.	1
R92/LED230	LED flashing light series R92 230V AC.	1
R91/AN1/LR1	Antenna for flashing light R92 series	1
R99/C/001	Signboard "Automatic Opening"	1

SPECIFICHE TECNICHE PRODOTTO	
Power line supply	230V AC - 50Hz
Motor power supply	230V AC
Power rating	200W
Frequency of use	40%
Thrust	2500N
Operating temperature	-20+55 C°
Protection level	IP43
Reductor Type	Irreversible
Manoeuvre speed	1,66 cm/s
Opening time at 90°	19 s
Stroke	320 mm
Motor thermal protection	150 C°
Incorporated condenser	15 µF

Limit switch	Microswitch in opening (optional in closing)
Encoder	-
Maximum dimension product in mm (L x W x H)	858,5 x 120 x 165
Product weight packed (Kg)	20,6
Number items per pallet	21


DIMENSIONI

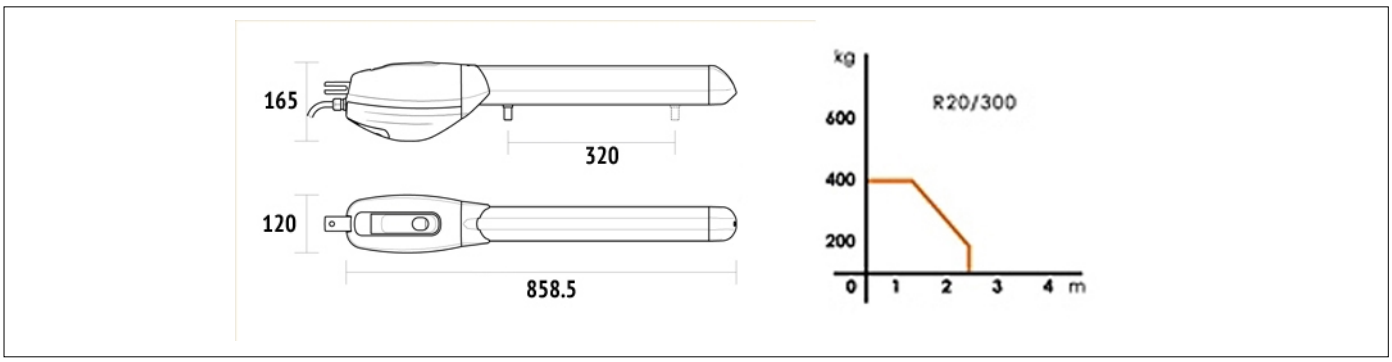


PRODOTTI ACCESSORI




MC770
Kit optional microswitch in closing with cable series R20.




MC780
Kit 2 mechanical stop R20 series.




KT202/R
Screw-welded short front bracket.



KT204/R
Screw-adjustable short rear bracket.



KT206
Kit 3 hinge plates short, to weld.



KT206/R
Kit of screw-adjustable short rear bracket and screw-welded short front bracket.