KIT PRODUCT TECHNICAL DATASHEET

KIT R20/510




COMPOSIZIONE KIT R20/510

CODICE	DESCRIZIONE	QTA
R20/500	Electromechanical actuator 230V AC irreversible ideal for swing gates with leaf up to 3,5 mt. long, fast, with 1 microswitch, complete with fixing plates.	2
H70/200AC/BOX	Control unit for 2 motors 230V AC with slow down, with plastic box.	1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70, EDGE and CTRL.	1
E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2
R90/F2ES	Pair of external photocells synchronized.	1
R92/LED230	LED flashing light series R92 230V AC.	1
R91/AN1/LR1	Antenna for flashing light R92 series	1
R99/C/001	Signboard "Automatic Opening"	1

SPECIFICHE TECNICHE PRODOTTO	
Power line supply	230V AC - 50Hz
Motor power supply	230V AC
Power rating	200W
Frequency of use	40%
Thrust	2500 N
Operating temperature	-20+55°C
Protection level	IP 43
Reductor Type	Irreversible
Manoeuvre speed	1,66 cm/s
Opening time at 90°	27 s
Stroke	520 mm
Motor thermal protection	150°C
Incorporated condenser	15 µF


Limit switch	Microswitch in opening (optional in closing)
Encoder	-
Maximum dimension product in mm (L x W x H)	1088,5 x 120 x 165
Product weight packed (Kg)	24.7
Number items per pallet	18

DIMENSIONI

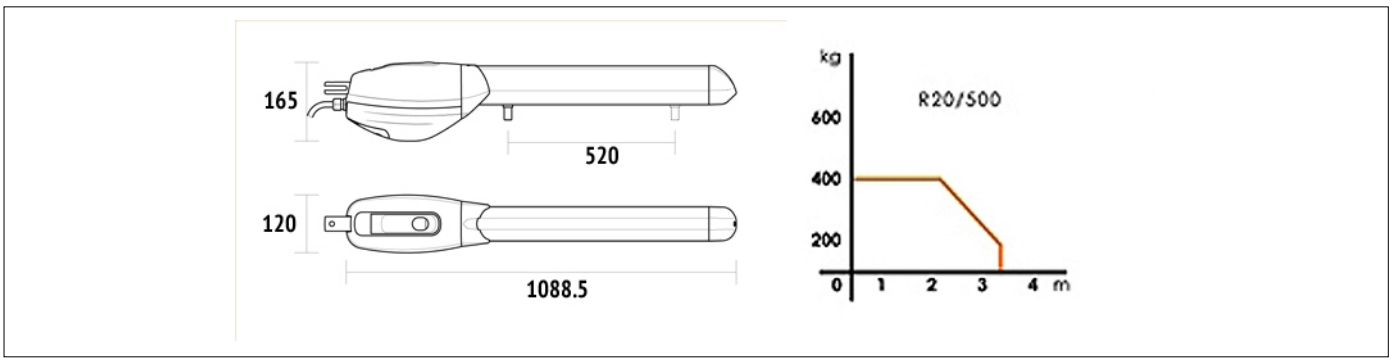

DIMENSIONS

PREDISPOSIZIONI INSTALLAZIONE STANDARD

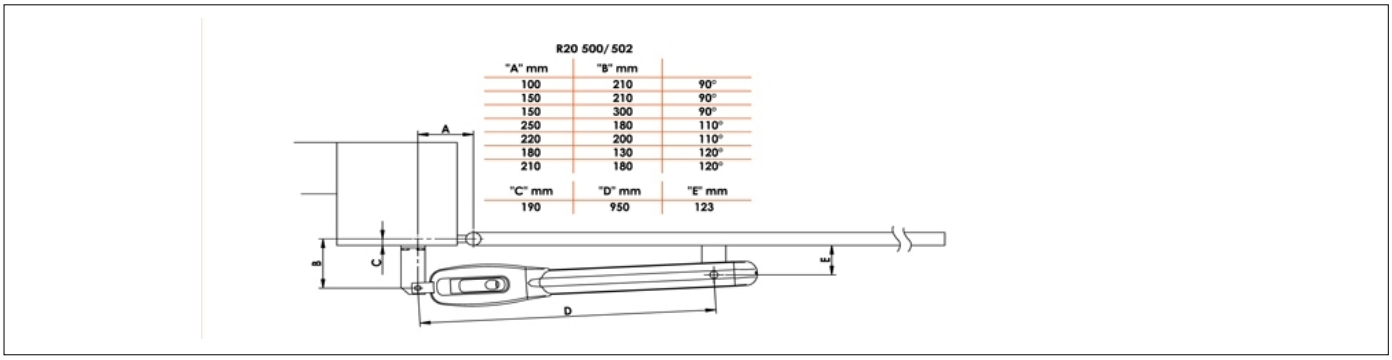


PREDISPOSITION FOR STANDARD INSTALLATION


PRODOTTI ACCESSORI




MC770
Kit optional microswitch in closing with cable series R20.




MC780
Kit 2 mechanical stop R20 series.



KT201/R
Screw-welded Long front bracket.



KT205
Kit 3 hinge plates long series, to weld.



KT205/R
Kit of screw-adjustable long rear bracket and screw-welded long front bracket.