230V AC


PRODUCT TECHNICAL DATASHEET
R21/361




CODE	DESCRIPTION	PCS/PALLET
R21/361	Electromechanical underground motor 230V AC irreversible ideal for swing gates with leaf up to 3,5 m. Standard version with 10 m cable.	50

PRODUCT TECHNICAL SPECIFICATIONS	
Power line supply	230V AC - 50Hz
Motor power supply	230V AC
Power rating	200W
Frequency of use	30%
Torque	300 N m
Operating temperature	-20+55°C
Protection level	IP67
Reductor Type	Irreversible
Manoeuvre speed	1,2 Rpm
Opening time	19 s
Motor thermal protection	150°C
Limit switch	Mechanical stoppers
Encoder	Optional as an accessory
Maximun opening	105° (optional 125° - 360°)
Power supply cable length	10m
Bearing on main shaft	Standard
Maximum dimension product in mm (L x W x H)	345 x 224 x 144
Product weight packed (Kg)	14,8
Number items per pallet	50

PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

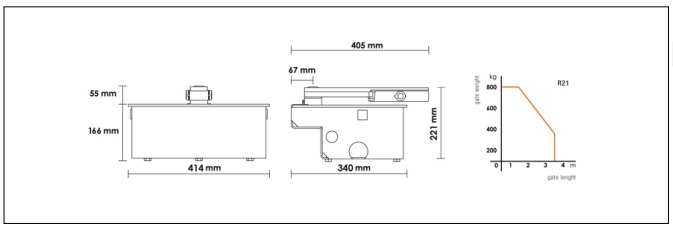

DIMENSIONS

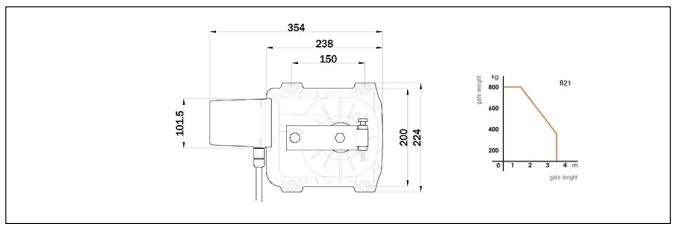

DIMENSIONS

PRODUCT ACCESSORIES



FU100
Cold galvanised foudation box and lid.




FU101
Hot galvanised foundation box and lid.




FU102
Hot galvanised foundation box and inox lid.




FU103
Inox AISI 304 foundation box and lid.




LT300
Levers for opening up to 125°.




LT301
Levers for opening up to 360°.




LT301/R
Levers for opening up to 360° , with reinforced chain.



LT300/90SX
Levers for opening up to 103° - 90° turned - left.




LT300/90DX
Levers for opening up to 103° - 90° turned - right.




LT327/SC
Pinion gear ¾ Z13 of adaptation in pinion combining ¾ Z16.




R21/ENC/10
Module encoder for R21 series with 10 mt cable.



RL650
Release system with standard lever.



RL650/R
Release system with standard lever,reinforced steel version.



RL651
Release system with european cylinder key.



RL663
Long release lever for underground.



R99/C/001AL
Signboard "Automatic Opening" Aluminium version.



R99/C/001
Signboard "Automatic Opening".